(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 4 August 2005 (04.08.2005)

PCT

(10) International Publication Number WO 2005/071975 A1

(51) International Patent Classification⁷:

H04N 9/29

(21) International Application Number:

PCT/EP2005/000739

- (22) International Filing Date: 26 January 2005 (26.01.2005)
- (25) Filing Language:

English

(26) Publication Language:

English

DE

(30) Priority Data: 102004004216.0 27 January 2004 (27.01.2004)

- (71) Applicant (for all designated States except US):


 DEUTSCHE THOMSON-BRANDT GMBH [DE/DE];

 Hermann-Schwer-Str. 3, 78048 Villingen-Schwenningen (DE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): LOUVEL, Jean-Paul [FR/DE]; Am Boegle 30, 78086 Brigachtal (DE). HALUPCZOK, Peter [DE/DE]; Grundlachen 8, 78054 Villingen-Schwenningen (DE).

- (74) Agent: ARNOLD, Klaus-Peter; Deutsche Thomson-Brandt GmbH, European Patent Operations, Karl-Wiechert-Allee 74, 30625 Hannover (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CIRCUIT ARRANGEMENT FOR DEGAUSSING A PICTURE TUBE, AND RESPECTIVE PICTURE DISPLAY DEVICE

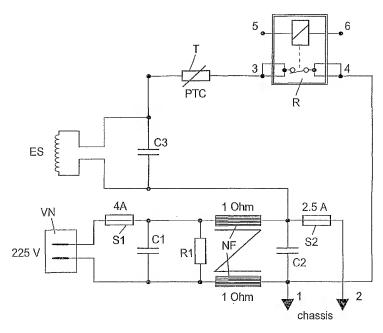

(57) Abstract: The circuit arrangement for degaussing a picture tube comprises a degaussing coil (ES), a single PTC element (T) and a switch (R), the degaussing coil (ES), the single PTC element (T) and the switch (R) being connected in series For a degaussing, the degaussing coil (ES) is activated by means of the switch (R) for a defined time interval such that the switch-off takes place at an ampere-turns product of greater than 5.



WO 2005/071975 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.